

# Mobile Communications

## Chapter 3 : Media Access

- Motivation
- SDMA, FDMA, TDMA
- Aloha, reservation schemes
- Collision avoidance, MACA
- Polling
- CDMA, SAMA
- Comparison


## Motivation

- Can we apply media access methods from fixed networks?
- Example CSMA/CD
  - **C**arrier **S**ense **M**ultiple **A**ccess with **C**ollision **D**etection
  - send as soon as the medium is free, listen into the medium if a collision occurs (legacy method in IEEE 802.3)
- Problems in wireless networks
  - signal strength decreases proportional to the square of the distance
  - the sender would apply CS and CD, but the collisions happen at the receiver
  - it might be the case that a sender cannot “hear” the collision, i.e., CD does not work
  - furthermore, CS might not work if, e.g., a terminal is “hidden”

# Motivation - hidden and exposed terminals

- Hidden terminals


- A sends to B, C cannot receive A
- C wants to send to B, C senses a "free" medium (CS fails)
- collision at B, A cannot receive the collision (CD fails)
- A is "hidden" for C

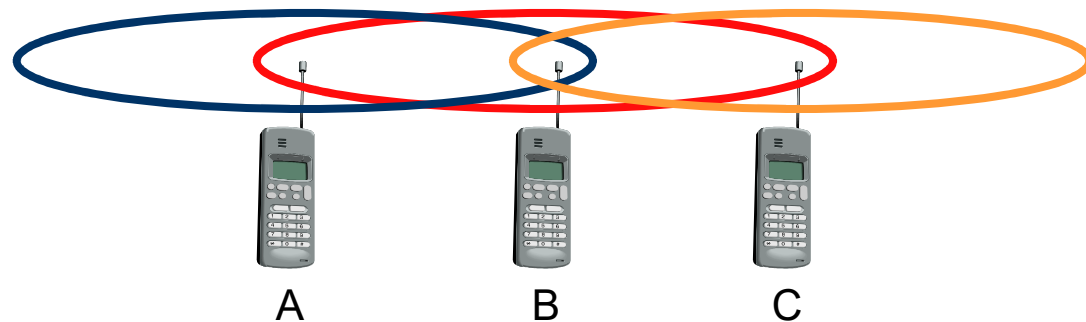

- Exposed terminals

- B sends to A, C wants to send to another terminal (not A or B)
- C has to wait, CS signals a medium in use
- but A is outside the radio range of C, therefore waiting is not necessary
- C is "exposed" to B

- Terminals A and B send, C receives
  - signal strength decreases proportional to the square of the distance
  - the signal of terminal B therefore drowns out A's signal
  - C cannot receive A

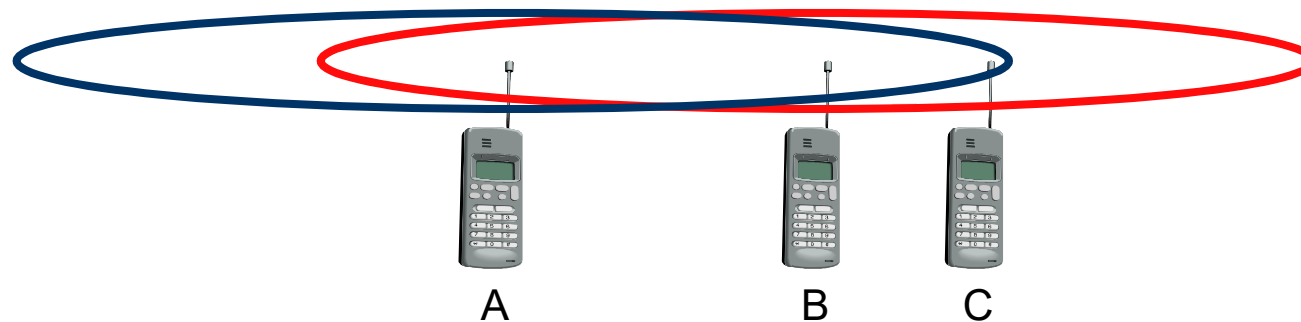


- If C for example was an arbiter for sending rights, terminal B would drown out terminal A already on the physical layer
- Also severe problem for CDMA-networks - precise power control needed!

## Access methods SDMA/FDMA/TDMA


---

- SDMA (Space Division Multiple Access)
  - segment space into sectors, use directed antennas
  - cell structure
- FDMA (Frequency Division Multiple Access)
  - assign a certain frequency to a transmission channel between a sender and a receiver
  - permanent (e.g., radio broadcast), slow hopping (e.g., GSM), fast hopping (FHSS, Frequency Hopping Spread Spectrum)
- TDMA (Time Division Multiple Access)
  - assign the fixed sending frequency to a transmission channel between a sender and a receiver for a certain amount of time
- CDMA (Code Division Multiple Access)
  
- The multiplexing schemes already presented, are now used to control medium access!

# FDD/FDMA - general scheme, example GSM

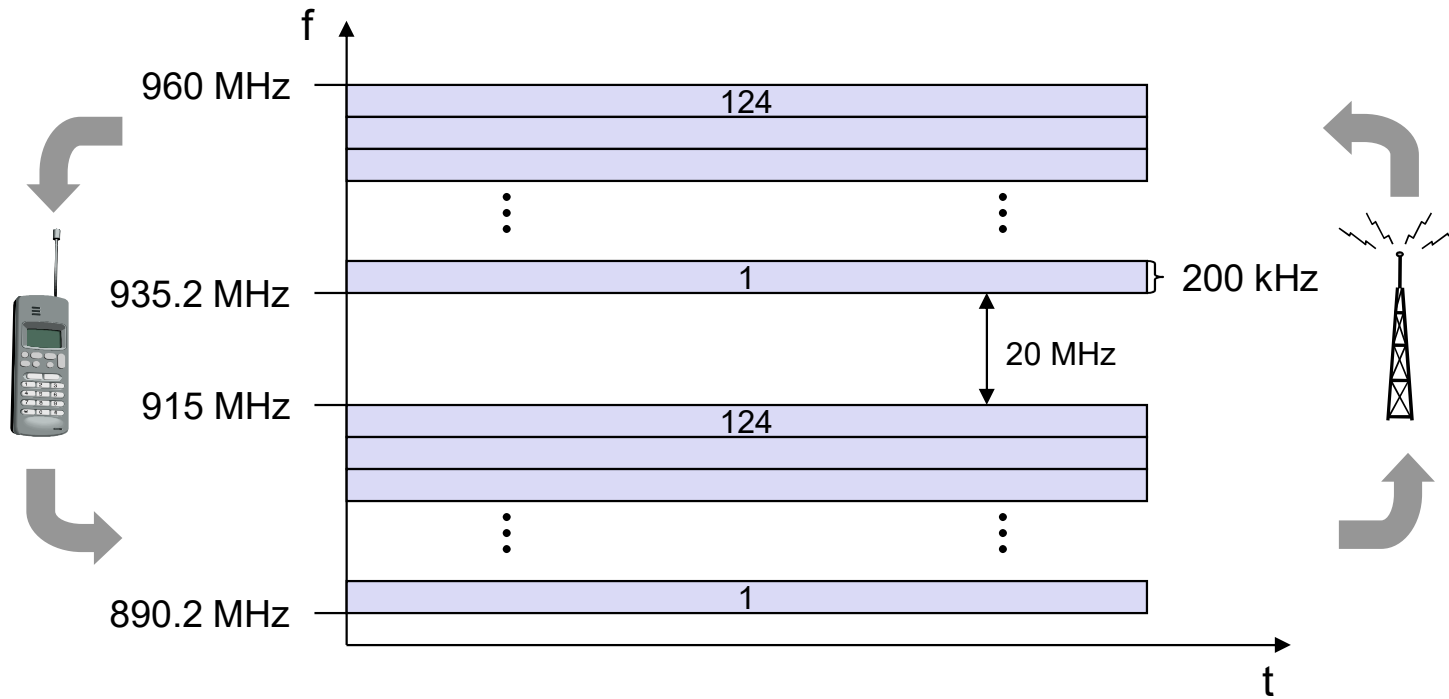


# TDD/TDMA - general scheme, example DECT

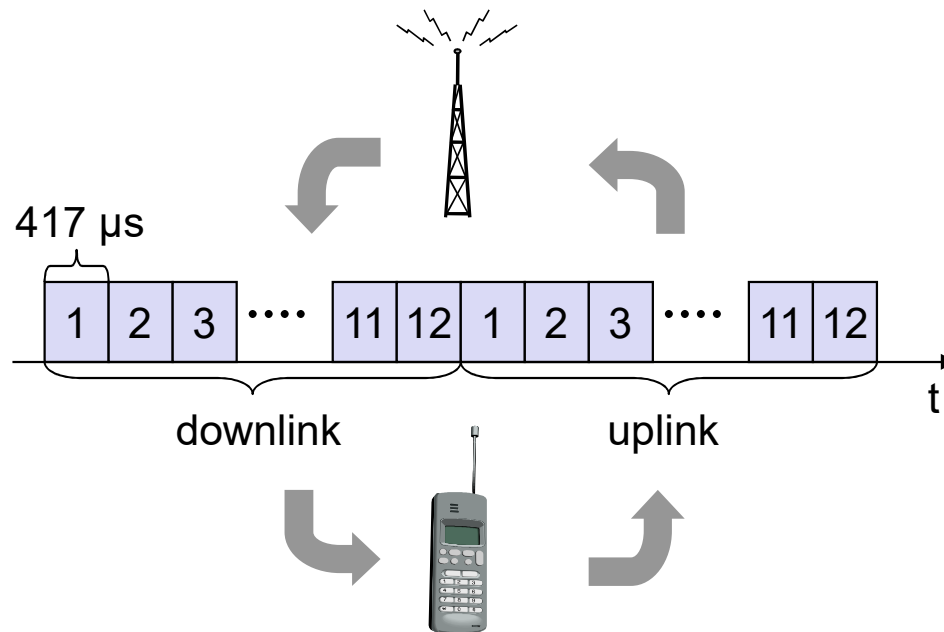


# Aloha/slotted aloha

- Mechanism
  - random, distributed (no central arbiter), time-multiplex
  - Slotted Aloha additionally uses time-slots, sending must always start at slot boundaries

## • Aloha

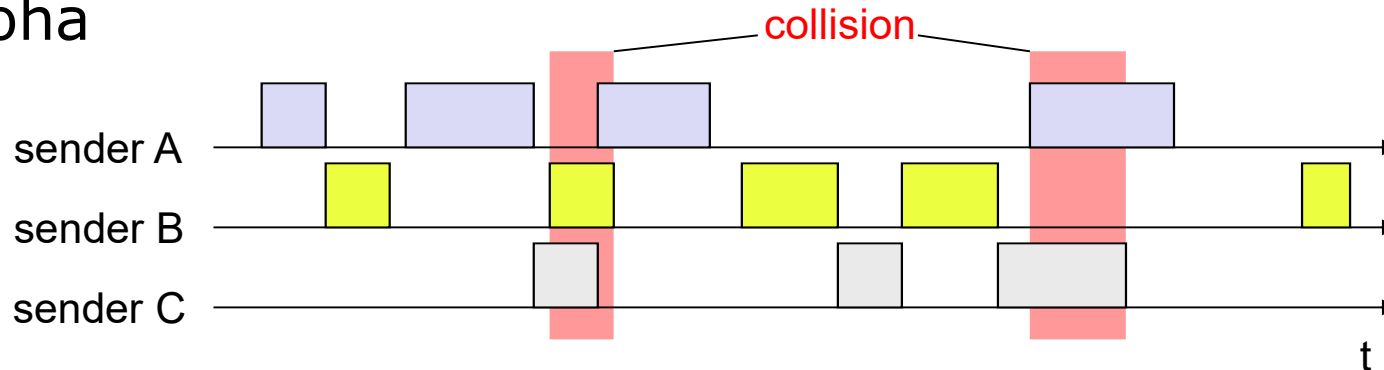

## • Slotted Aloha

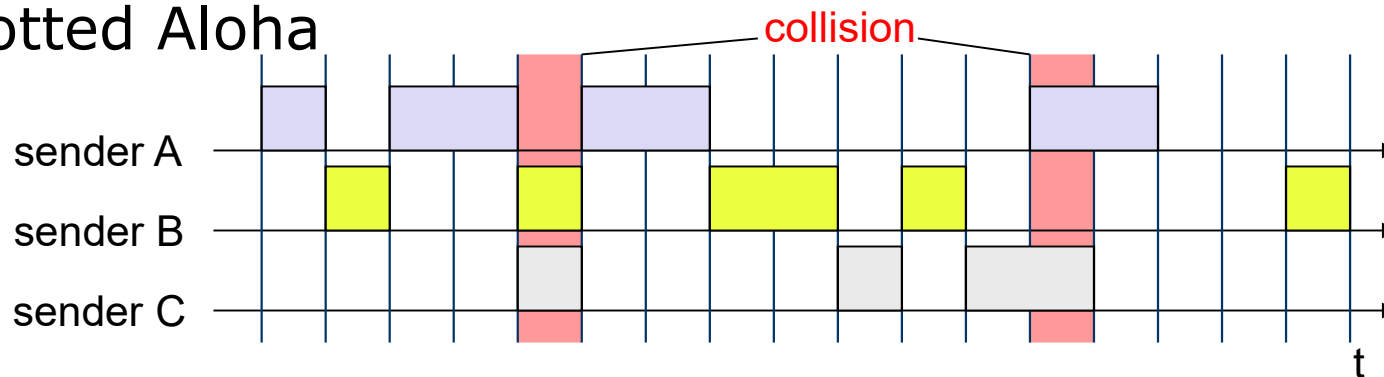




- Check if channel is free before sending
  - Performance climbs to above 90% if stations within range
- Non-persistent CSMA
  - Check if channel is idle
  - If idle, transmit
  - If busy, wait random time and try sensing again
- 1-persistent CSMA
  - Wait until idle then go for it
  - Blocked senders can queue up and collide
- p-persistent CSMA
  - If idle send with prob  $p$  until done; assumed slotted time
  - Choose  $p$  so  $p * \# \text{ senders} < 1$ ; avoids collisions at cost of delay
- *Slotted vs non-slotted*

# Aloha vs CSMA

- Assumes that there are no hidden terminals

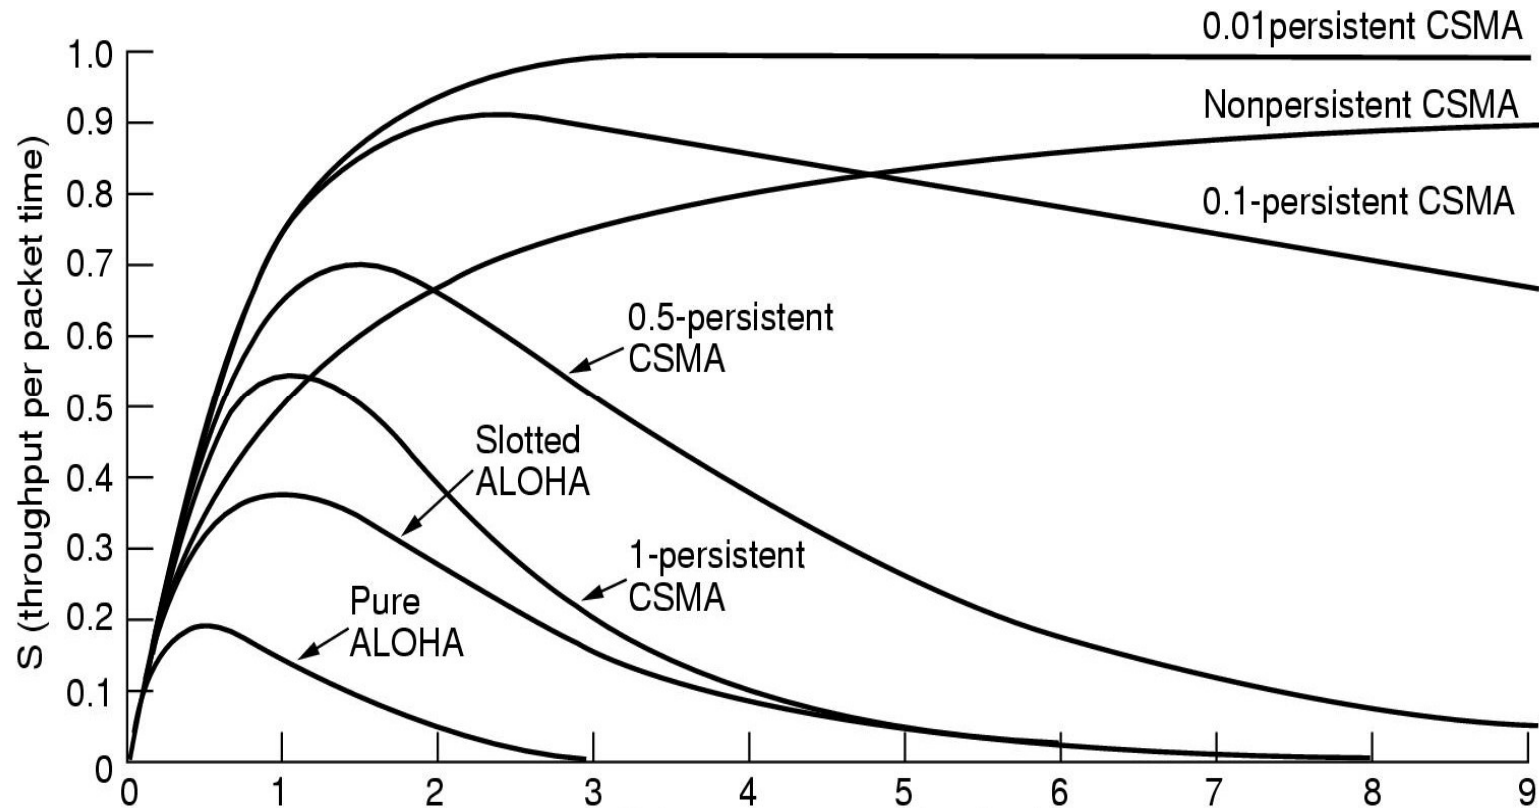


## MACA - collision avoidance

- MACA (Multiple Access with Collision Avoidance) uses short signaling packets for collision avoidance
  - RTS (request to send): a sender request the right to send from a receiver with a short RTS packet before it sends a data packet
  - CTS (clear to send): the receiver grants the right to send as soon as it is ready to receive
- Signaling packets contain
  - sender address
  - receiver address
  - packet size
- Variants of this method can be found in IEEE802.11 as DFWMAC (Distributed Foundation Wireless MAC)

## MACA examples


- MACA avoids the problem of hidden terminals

- A and C want to send to B
- A sends RTS first
- C waits after receiving CTS from B

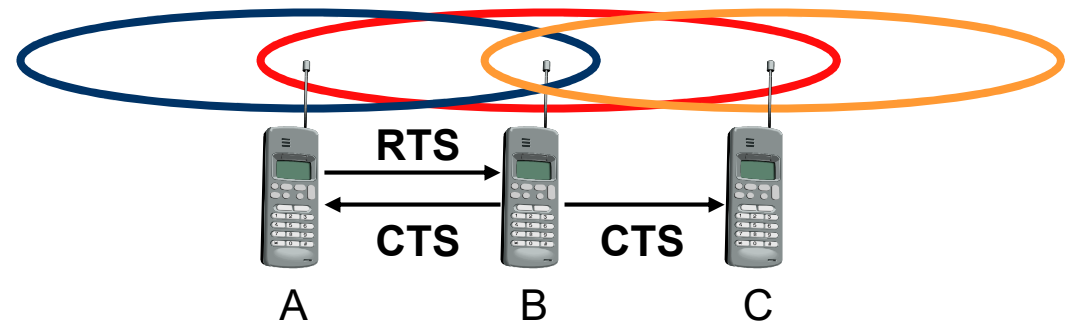


- MACA avoids the problem of exposed terminals

- B wants to send to A, C to another terminal
- now C does not have to wait for it, cannot receive CTS from A

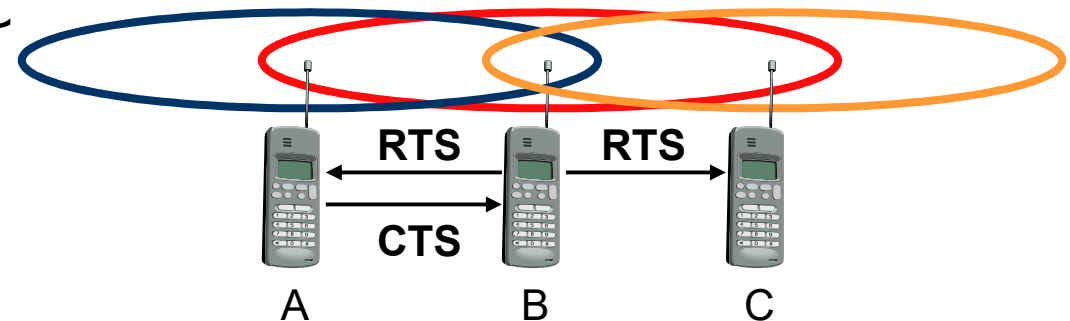

# MACA variant with ACK/NACK

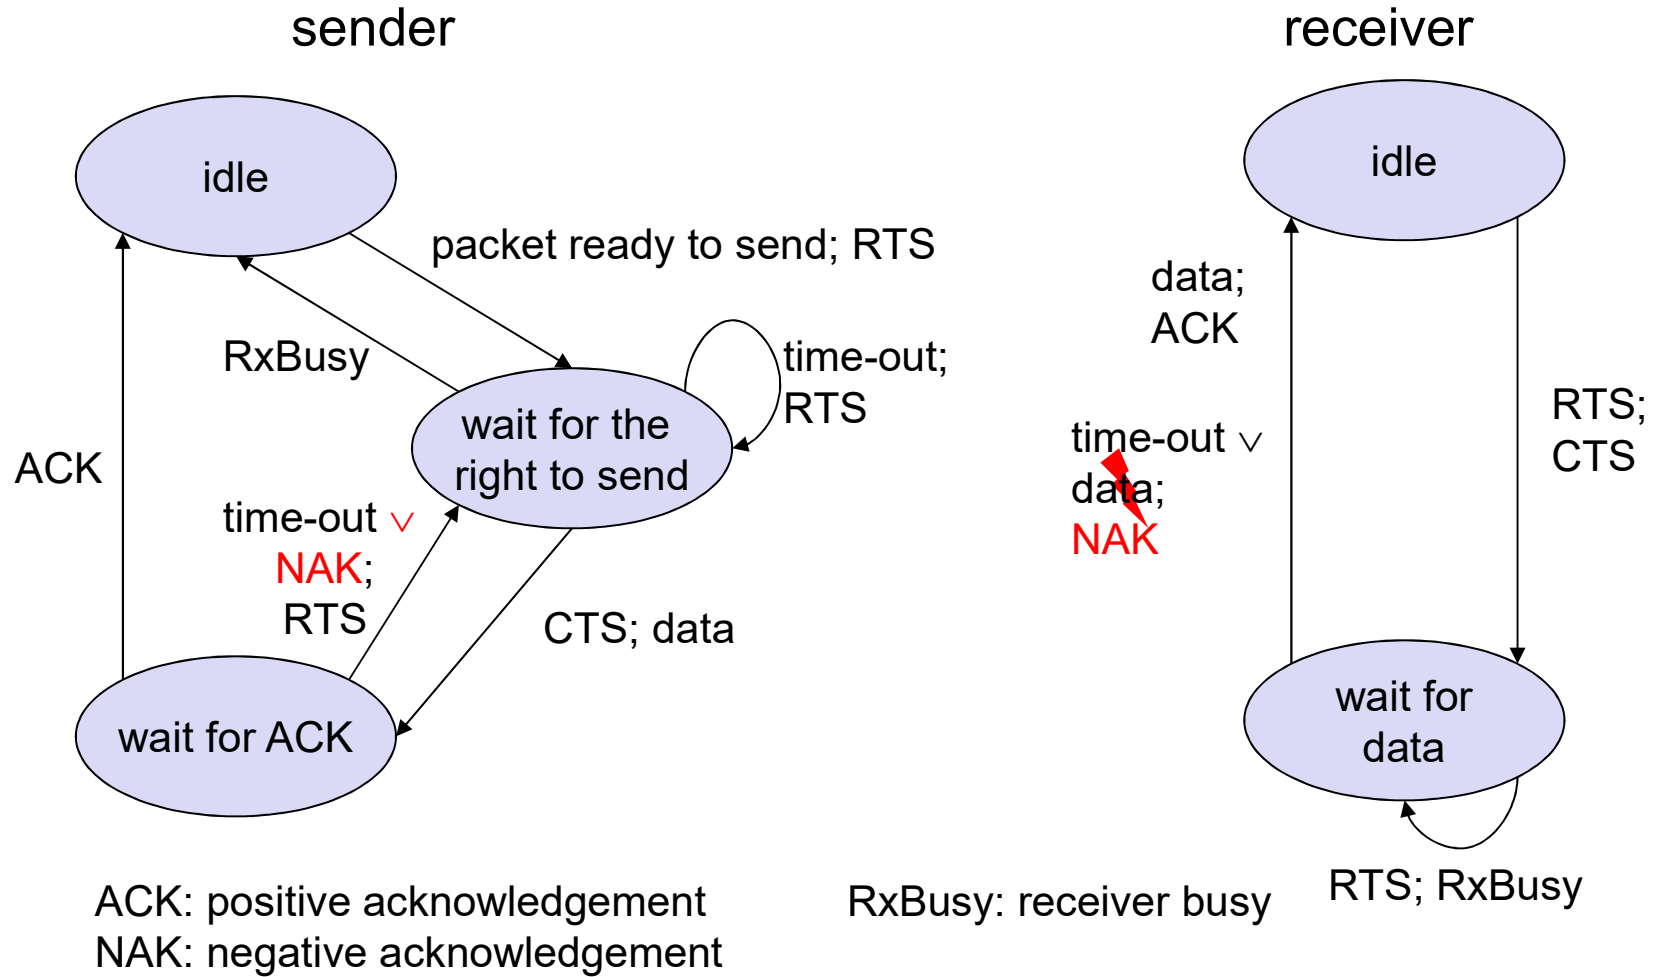


## Polling mechanisms

---

- If one terminal can be heard by all others, this “central” terminal (a.k.a. base station) can poll all other terminals according to a certain scheme
  - now all schemes known from fixed networks can be used (typical mainframe - terminal scenario)
- Example: Randomly Addressed Polling
  - base station signals readiness to all mobile terminals
  - terminals ready to send can now transmit a random number without collision with the help of CDMA or FDMA (the random number can be seen as dynamic address)
  - the base station now chooses one address for polling from the list of all random numbers (collision if two terminals choose the same address)
  - the base station acknowledges correct packets and continues polling the next terminal
  - this cycle starts again after polling all terminals of the list

- Current state of the medium is signaled via a “busy tone”
  - the base station signals on the downlink (base station to terminals) if the medium is free or not
  - terminals must not send if the medium is busy
  - terminals can access the medium as soon as the busy tone stops
  - the base station signals collisions and successful transmissions via the busy tone and acknowledgements, respectively (media access is not coordinated within this approach)
  - mechanism used, e.g., for CDPD (USA, integrated into AMPS)

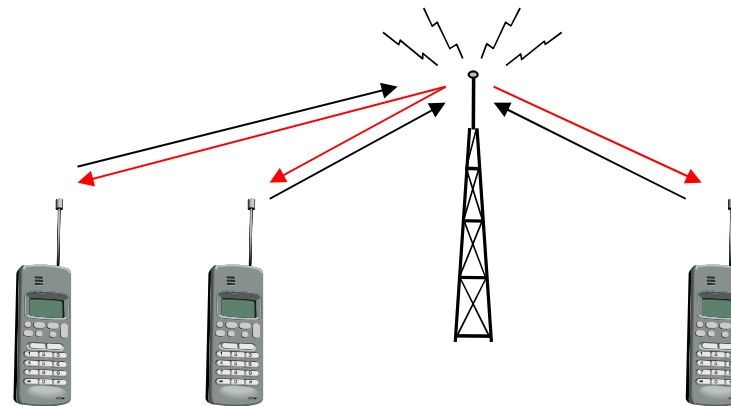

# Comparison SDMA/TDMA/FDMA/CDMA

Approach	SDMA	TDMA	FDMA	CDMA
Idea	segment space into cells/sectors	segment sending time into disjoint time-slots, demand driven or fixed patterns	segment the frequency band into disjoint sub-bands	spread the spectrum using orthogonal codes
Terminals	only one terminal can be active in one cell/one sector	all terminals are active for short periods of time on the same frequency	every terminal has its own frequency, uninterrupted	all terminals can be active at the same place at the same moment, uninterrupted
Signal separation	cell structure, directed antennas	synchronization in the time domain	filtering in the frequency domain	code plus special receivers
Advantages	very simple, increases capacity per km <sup>2</sup>	established, fully digital, flexible	simple, established, robust	flexible, less frequency planning needed, soft handover
Dis-advantages	inflexible, antennas typically fixed	guard space needed (multipath propagation), synchronization difficult	inflexible, frequencies are a scarce resource	complex receivers, needs more complicated power control for senders
Comment	only in combination with TDMA, FDMA or CDMA useful	standard in fixed networks, together with FDMA/SDMA used in many mobile networks	typically combined with TDMA (frequency hopping patterns) and SDMA (frequency reuse)	still faces some problems, higher complexity, lowered expectations; will be integrated with TDMA/FDMA